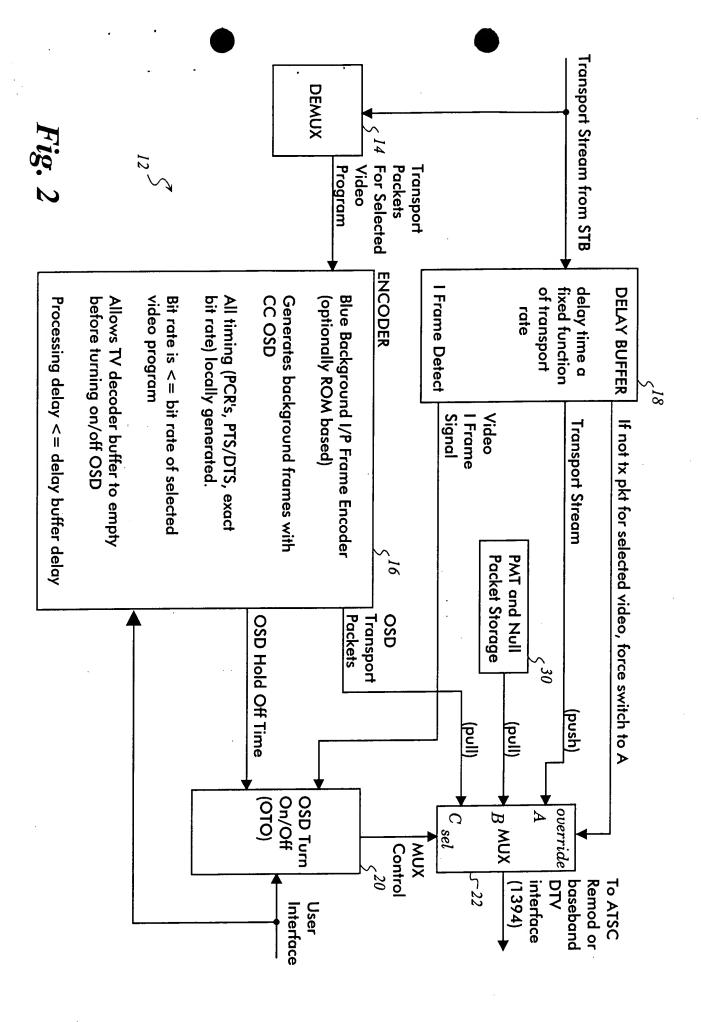
RECEIVEL


JUL 26 1999


TECH CENTER 2700


user input: turn OSD on/off, if on, select what encoded video selected MPEG services program and other transport stream with multiplexed MPEG 2 to display If OSD on, delete incoming generated MPEG encoded OSD video and replace with locally Analyze incoming stream multiplexed MPEG 2 transport stream consisting of either a) original stream intact
b) packets for selected MPEG encoded video program deleted and replaced by packets for MPEG encoded locally generated video with OSD To ATSC Remod or baseband DTV interface (1394)

Fig. 1



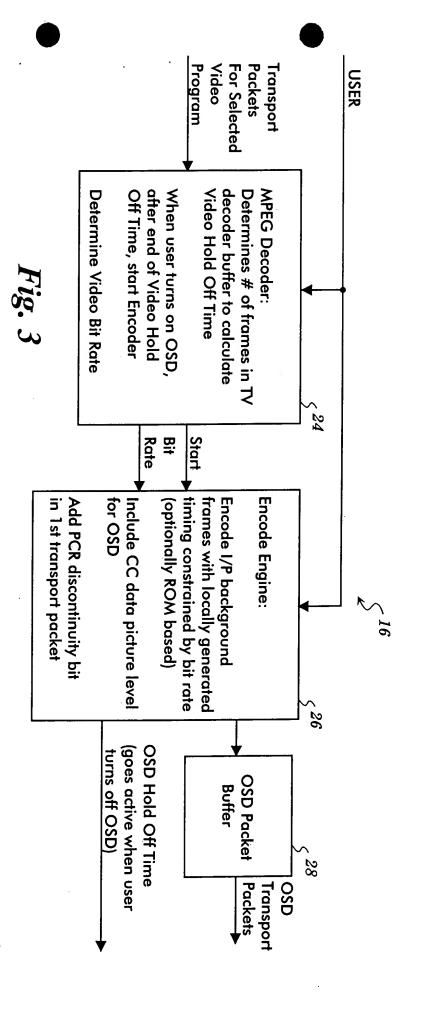

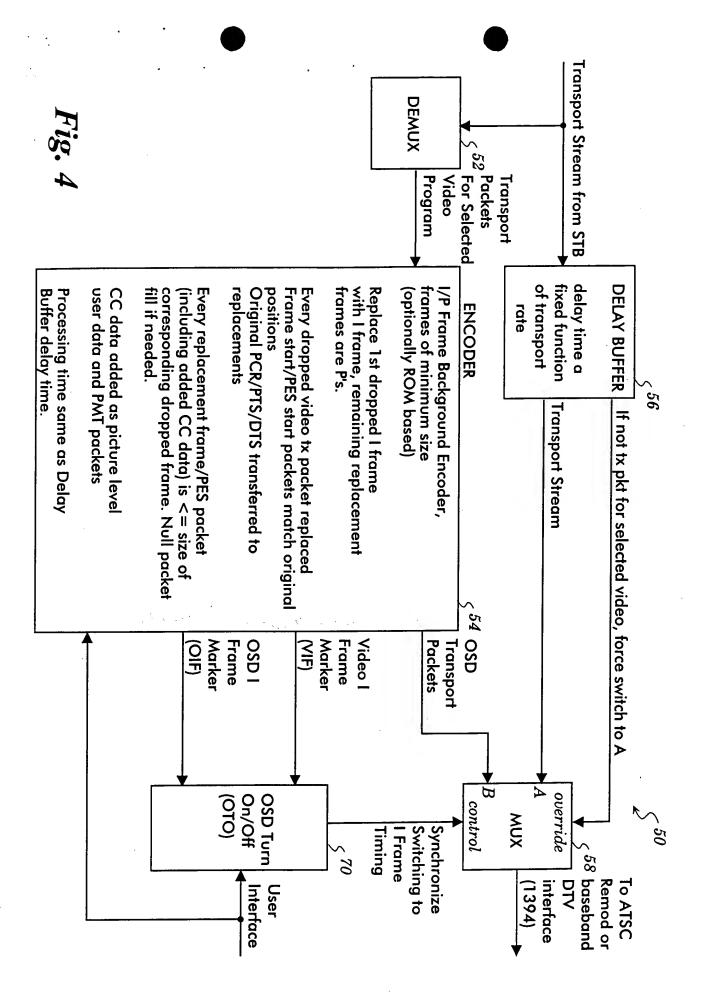

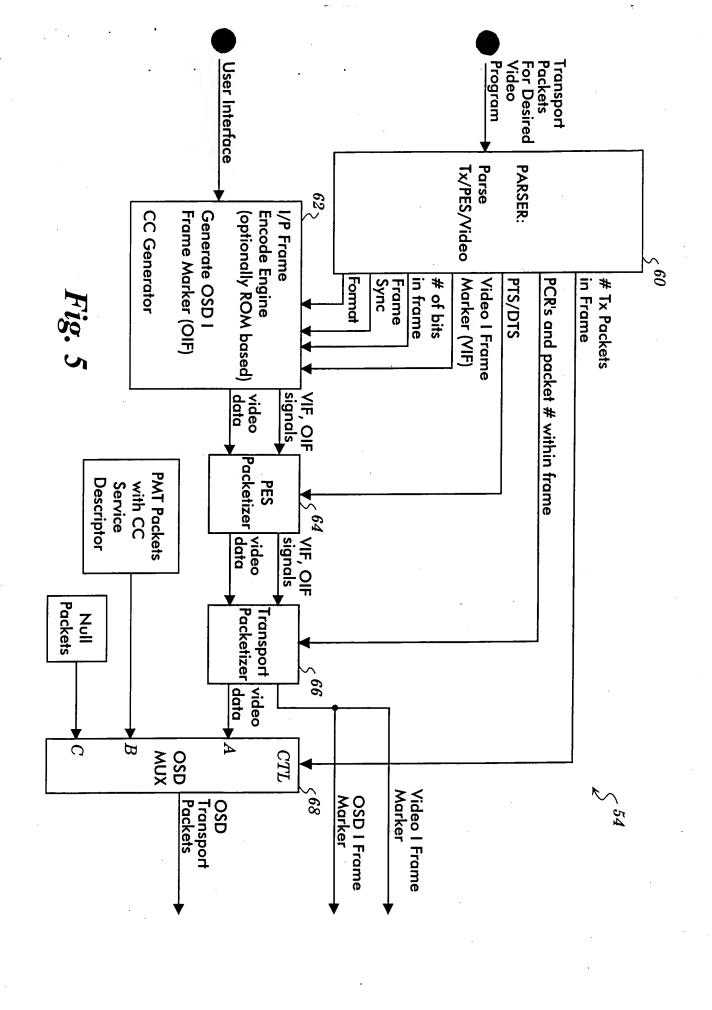

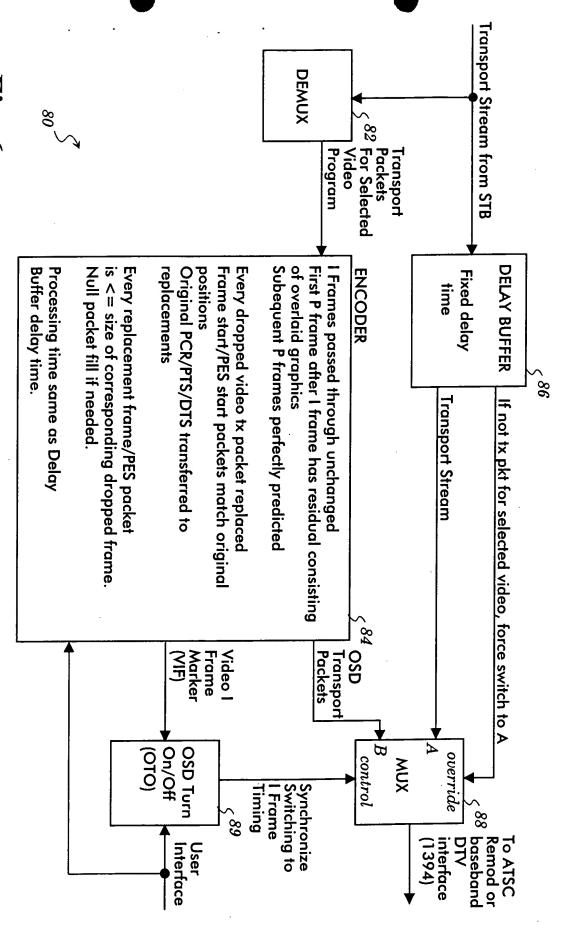


Fig. 6

